


Worm Drive Serrated Clamp



Ref. standard: BS5315/IS4762

- Trivalent & hexavalent passivized zinc plating.
- Useful for soft hose applications.

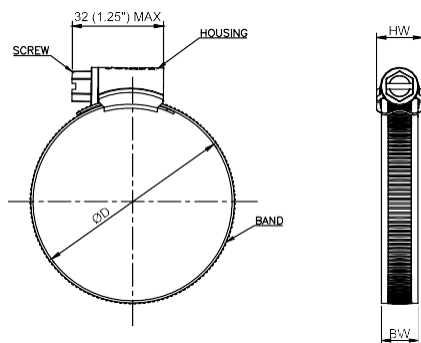

Short Description

Jolly Serrated Worm Drive Clamp is designed for low pressure & light duty applications. It is suitable for soft hose applications like Automotive Aftermarket, Agricultural applications, Irrigation Field & Industrial application. Jolly Serrated Worm Drive Clamp is designed as per IS/BS standard & available in both trivalent & hexavalent passivized zinc plating option.

Example for Ordering Code

WN M01 B11 J000

Design Type

Jolly Size

Material Grade

Band width (BW) & Housing width (HW)

* Jolly size ordering codes vary as per SAE & IS/BS sizes.

Design Type Ordering Code : WN

DN equivalent	Ordering Code	Material Grade Option
W1	M11	All parts : Plated Carbon Steel

Ordering Code	Band (BW) & Housing (HW) Width Options
B11	Band : 12.5 mm (0.50") Housing : 16 mm (0.63")
B15	Band : 9 mm Housing : 12.5 mm

Note: Clamps below dia 22 mm are made as per B15 ordering code.

Area of Application

Agricultural • Light Duty Automotive • Industrial • Domestic • Hardware

Jolly sizes as per IS/BS Standard

Jolly Size Ordering Code	IS / BS Sizes	Min Dia (in)	Max Dia (in)	Min Dia (mm)	Max Dia (mm)
J000	12	0.354	0.472	9	12
J00M	16	0.433	0.630	11	16
J00	20	0.512	0.787	13	20
J0	22	0.630	0.866	16	22
J100S	25	0.709	0.984	18	25
J0X	28	0.787	1.102	20	28
J1A	30	0.866	1.181	22	30
J137S	35	0.984	1.378	25	35
J1	38	1.181	1.496	30	38
J1X	40	1.181	1.575	30	40
J45A	45	1.378	1.772	35	45
J2A	50	1.496	1.969	38	50
J2	55	1.654	2.165	42	55
J2X	60	1.772	2.362	45	60
J3	70	1.969	2.756	50	70
J75A	75	2.165	2.953	55	75
J3X	80	2.362	3.150	60	80
J4	90	2.756	3.543	70	90
J4X	100	3.150	3.937	80	100
J110A	110	3.543	4.331	90	110
J5	115	3.740	4.528	95	115
J5X	120	3.937	4.724	100	120
J6	130	4.331	5.118	110	130
J575 S	145	4.921	5.709	125	145
J6X	160	5.512	6.299	140	160
J7	178	6.220	7.008	158	178
J8	204	7.244	8.031	184	204
J9	230	8.268	9.055	210	230
J11	280	10.236	11.024	260	280
J12	305	11.220	12.008	285	305
J13	330	12.205	12.992	310	330
J14	355	13.189	13.976	335	355
J15	380	14.173	14.961	360	380
J16	406	15.197	15.984	386	406
J19	482	18.189	18.976	462	482
J21	535	20.276	21.063	515	535
J22	560	21.260	22.047	540	560

Additional sizes are available as per enquiry.

We reserve the right to make technical & dimensional modifications within Standard specification .

UPC code made available on request.

Packing Specification available.