



Spring-Loaded T-Bolt Clamp

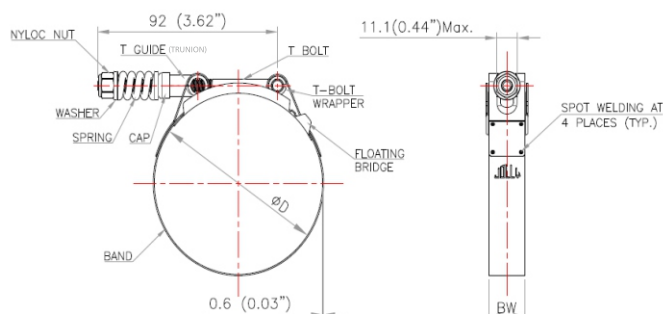

Example for Ordering Code

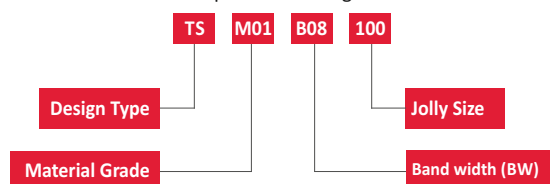

Design Type Ordering Code : TS

Ordering Code	Material Grade Option
M01	Band : SS 301 / 304 T-Bolt, Trunion, Nut & Spring : SS 301 / 304
M02	Band & Trunion : SS 301 / 304 T-Bolt, Nut & Spring : Plated Carbon Steel
M05	Band : SS 201 / 202 T-Bolt, Trunion, Nut & Spring : Plated Carbon Steel
M06	Band : SS 316 T-Bolt, Trunion, Nut & Spring : SS 316
M10	Band, T-Bolt, Trunion : SS 201 / 202 Nut & Spring : Plated Carbon Steel
M15	Band, T-Bolt, Trunion : SS 301 / 304 Nut & Spring : Plated Carbon Steel
M16	Band, Trunion & Spring : SS 301 / 304 T-Bolt & Nut : Plated Carbon Steel
M17	Band : SS 301 / 304 T-Bolt, Trunion, Nut & Spring : Plated Carbon Steel

Note: Helical Spring is generally made in high carbon steel unless special requirement is specified.

Ordering Code	Band (BW) & Bridge (HW) Width Options
B08	Band : 19 mm (0.75") Floating Bridge : 22.5 mm (0.89")

Ref. standard: SAE J1508 Type "SLTB"

- Constant band tension.
- Spring mechanism compensates for thermal variations.

Jolly sizes as per SAE Standard

Jolly Size Ordering Code	SAE Sizes	Min Dia (in)	Max Dia (in)	Min Dia (mm)	Max Dia (mm)
28	28	1 3/4	2	44.5	50.8
32	32	1 7/8	2 3/16	47.8	55.6
34	34	1 15/16	2 1/4	49.2	57.2
36	36	2	2 5/16	50.8	58.7
38	38	2 1/16	2 3/8	52.4	60.3
40	40	2 1/8	2 7/16	54.1	62
42	42	2 3/16	2 1/2	55.6	63.5
44	44	2 1/4	2 9/16	57.2	65
48	48	2 3/8	2 11/16	60.5	68.3
52	52	2 1/2	2 13/16	63.5	71.4
54	54	2 9/16	2 7/8	65.1	73.0
56	56	2 5/8	2 15/16	66.8	74.7
60	60	2 3/4	3 1/16	69.9	77.7
64	64	2 7/8	3 3/16	73.2	81
68	68	3	3 5/16	76.2	84.1
72	72	3 1/8	3 7/16	79.5	87.4
74	72	3 1/8	3 7/16	79.5	87.4
76	76	3 1/4	3 9/16	82.6	90.4
78	78	3 5/16	3 5/8	84.1	92.1
80	80	3 3/8	3 11/16	85.9	93.7
84	84	3 1/2	3 13/16	88.9	96.8
88	88	3 5/8	3 15/16	92.2	100.1
92	92	3 3/4	4 1/16	95.3	103.1
96	96	3 7/8	4 3/16	98.4	106.4
100	100	4	4 5/16	101.6	109.5
104	104	4 1/8	4 7/16	104.8	112.7
108	108	4 1/4	4 9/16	108	115.8
110	110	4 5/16	4 5/8	109.5	117.5
112	112	4 3/8	4 11/16	111.1	119.1
116	116	4 1/2	4 13/16	114.3	122.2
124	124	4 3/4	5 1/16	120.7	128.5
132	132	5	5 5/16	127	134.9
134	134	5 1/16	5 3/8	128.6	136.5
140	140	5 1/4	5 9/16	133.4	141.2
142	142	5 5/16	5 5/8	134.9	142.9
144	144	5 3/8	5 11/16	136.5	144.5
146	146	5 7/16	5 3/4	138.1	146.1
148	148	5 1/2	5 13/16	139.7	147.6
156	156	5 3/4	6 1/16	146.1	153.9
164	164	6	6 5/16	152.4	160.3
168	168	6 1/8	6 7/16	155.6	163.5
172	172	6 1/4	6 9/16	158.8	166.6
174	174	6 5/16	6 5/8	160.3	168.3
180	180	6 1/2	6 13/16	165.1	173
188	188	6 3/4	7 1/16	171.5	179.3
196	196	7	7 5/16	177.8	185.7
204	204	7 1/4	7 9/16	184.2	192
212	212	7 1/2	7 13/16	190.5	198.4
220	220	7 3/4	8 1/16	196.9	204.7
228	228	8	8 5/16	203.2	211.1
236	236	8 1/4	8 9/16	209.6	217.4
244	244	8 1/2	8 13/16	215.9	223.8

Additional sizes are available as per enquiry.

We reserve the right to make technical modifications.

UPC code can be made available on request.

Packing Specification available.