


# Worm Drive Lined Clamp

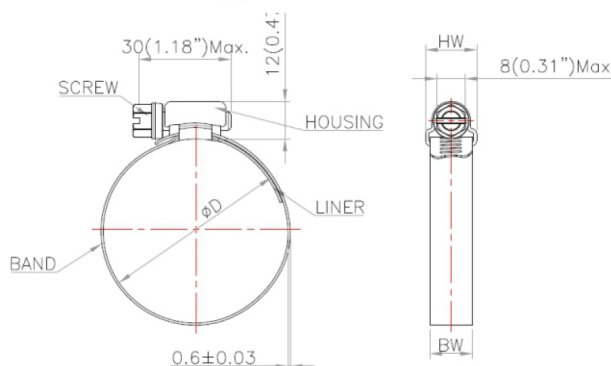

Example for Ordering Code

**WL M01 B03 20**

Design Type

Jolly Size

Material Grade

Band width (BW) & Housing width (HW)

\* Jolly size ordering codes vary as per SAE & IS/BS sizes.

\* Underlap / liner can be given for clamp above 38 mm

## Design Type Ordering Code : WL

| Ordering Code | Material Grade Option                                            |
|---------------|------------------------------------------------------------------|
| <b>M01</b>    | All parts : SS 301 / 304                                         |
| <b>M02</b>    | Band & Housing : SS 301 / 304<br>Screw : Plated Carbon Steel     |
| <b>M03</b>    | Band & Housing : SS 301 / 304<br>Screw : SS 410                  |
| <b>M04</b>    | Band & Housing : SS 201 / 202 Screw:SS 304                       |
| <b>M06</b>    | All parts : SS 316                                               |
| <b>M07</b>    | Band & Housing : SS 201 / 202<br>Screw : Plated Carbon Steel     |
| <b>M13</b>    | Band : SS 201 / 202<br>Housing & Screw : Plated Carbon Steel     |
| <b>M14</b>    | Band & Housing : SS 201 / 202<br>Screw : SS 410                  |
| <b>M17</b>    | Band : SS 301 / 304<br>Housing & Screw : Plated Carbon Steel     |
| <b>M18</b>    | Band : SS 202<br>Housing : SS 201<br>Screw : Plated Carbon Steel |

| Ordering Code | Band (BW) & Housing (HW) Width Options             |
|---------------|----------------------------------------------------|
| <b>B01</b>    | Band : 12.7 mm (0.5")<br>Housing : 15.5 mm (0.61") |
| <b>B02</b>    | Band : 14 mm (0.55")<br>Housing : 16.5 mm (0.65")  |
| <b>B03</b>    | Band : 16 mm (0.63")<br>Housing : 18.5 mm (0.73")  |
| <b>B15</b>    | Band : 9 mm<br>Housing : 12.5 mm                   |

## Ref. standard: SAE J1508 Type "MX"

- Incorporated Liner design.
- Prevents hose biting in case of soft hoses due to pierced threads.
- Useful in soft nitrile hose clamping applications.

## Jolly sizes as per IS/BS Standard

| Jolly Size Ordering Code | IS / BS Sizes | Min Dia (in) | Max Dia (in) | Min Dia (mm) | Max Dia (mm) |
|--------------------------|---------------|--------------|--------------|--------------|--------------|
| <b>J1X</b>               | 40            | 1.181        | 1.575        | 30           | 40           |
| <b>J45A</b>              | 45            | 1.378        | 1.772        | 35           | 45           |
| <b>J2A</b>               | 50            | 1.496        | 1.969        | 38           | 50           |
| <b>J2</b>                | 55            | 1.654        | 2.165        | 42           | 55           |
| <b>J2X</b>               | 60            | 1.772        | 2.362        | 45           | 60           |
| <b>J65A</b>              | 65            | 1.772        | 2.559        | 45           | 65           |
| <b>J3</b>                | 70            | 1.969        | 2.756        | 50           | 70           |
| <b>J75A</b>              | 75            | 2.165        | 2.953        | 55           | 75           |
| <b>J3X</b>               | 80            | 2.362        | 3.150        | 60           | 80           |
| <b>J4</b>                | 90            | 2.756        | 3.543        | 70           | 90           |
| <b>J4X</b>               | 100           | 3.150        | 3.937        | 80           | 100          |
| <b>J110A</b>             | 110           | 3.543        | 4.331        | 90           | 110          |
| <b>J5</b>                | 115           | 3.740        | 4.528        | 95           | 115          |
| <b>J5X</b>               | 120           | 3.937        | 4.724        | 100          | 120          |
| <b>J6</b>                | 130           | 4.331        | 5.118        | 110          | 130          |
| <b>J575 S</b>            | 145           | 4.921        | 5.709        | 125          | 145          |
| <b>J6Z</b>               | 160           | 5.512        | 6.299        | 140          | 160          |

Additional sizes are available as per enquiry.

## Jolly sizes as per SAE Standard

| Jolly Size Ordering Code | SAE Sizes | Min Dia (in) | Max Dia (in) | Min Dia (mm) | Max Dia (mm) |
|--------------------------|-----------|--------------|--------------|--------------|--------------|
| <b>20</b>                | 20        | 1 1/8        | 1 3/4        | 29           | 44           |
| <b>24</b>                | 24        | 1 1/4        | 2            | 32           | 51           |
| <b>28</b>                | 28        | 1 5/16       | 2 1/4        | 33           | 57           |
| <b>32</b>                | 32        | 1 9/16       | 2 1/2        | 40           | 63           |
| <b>36</b>                | 36        | 1 13/16      | 2 3/4        | 46           | 70           |
| <b>40</b>                | 40        | 2 1/16       | 3            | 52           | 76           |
| <b>44</b>                | 44        | 2 5/16       | 3 1/4        | 59           | 82           |
| <b>48</b>                | 48        | 2 9/16       | 3 1/2        | 65           | 89           |
| <b>52</b>                | 52        | 2 13/16      | 3 3/4        | 72           | 95           |
| <b>56</b>                | 56        | 3 1/16       | 4            | 78           | 101          |
| <b>60</b>                | 60        | 3 9/16       | 4 1/4        | 84           | 108          |
| <b>64</b>                | 64        | 3 9/16       | 4 1/2        | 91           | 114          |
| <b>72</b>                | 72        | 4 1/16       | 5            | 103          | 127          |

Additional sizes are available as per enquiry.

We reserve the right to make technical modifications.  
UPC code can be made available on request.  
Packing Specification available.