


Stainless Steel Worm Drive Clamp



Ref. standard: SAE J1508 Type "F"

- Non- throbbing surfaces.
- Clean punched perforations.
- Application ranging from domestic to heavy industries.

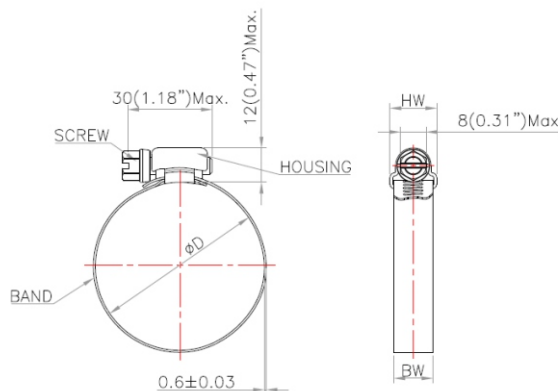

Example for Ordering Code

WP M01 B03 06

Design Type

Jolly Size

Material Grade

Band width (BW) & Housing width (HW)

* Jolly size ordering codes vary as per SAE & IS/BS sizes.

Design Type Ordering Code : WP

Ordering Code	Material Grade Option
M01	All parts : SS 301 / 304
M02	Band & Housing : SS 301 / 304 Screw : Plated Carbon Steel
M03	Band & Housing : SS 301 / 304 Screw : SS 410
M04	Band & Housing : SS 201 / 202 Screw:SS 304
M06	All parts : SS 316
M07	Band & Housing : SS 201 / 202 Screw : Plated Carbon Steel
M13	Band : SS 201 / 202 Housing & Screw : Plated Carbon Steel
M14	Band & Housing : SS 201 / 202 Screw : SS 410
M17	Band : SS 301 / 304 Housing & Screw : Plated Carbon Steel
M18	Band : SS 202 Housing : SS 201 Screw : Plated Carbon Steel

Ordering Code	Band (BW) & Housing (HW) Width Options
B01	Band : 12.7 mm (0.5") Housing : 15.5 mm (0.61")
B02	Band : 14 mm (0.55") Housing : 16.5 mm (0.65")
B03	Band : 16 mm (0.63") Housing : 18.5 mm (0.73")
B15	Band : 9 mm Housing : 12.5 mm

* Jolly size ordering codes vary as per SAE & IS/BS sizes.

Jolly sizes as per IS/BS Standard

Jolly Size Ordering Code	IS / BS Sizes	Min Dia (in)	Max Dia (in)	Min Dia (mm)	Max Dia (mm)
J000	12	0.354	0.472	9	12
J00M	16	0.433	0.630	11	16
J00	20	0.512	0.787	13	20
J0	22	0.630	0.866	16	22
J100S	25	0.709	0.984	18	25
J0X	28	0.787	1.102	20	28
J1A	30	0.866	1.181	22	30
J137S	35	0.984	1.378	25	35
J1	38	1.181	1.496	30	38
J1X	40	1.181	1.575	30	40
J45A	45	1.378	1.772	35	45
J2A	50	1.496	1.969	38	50
J2	55	1.654	2.165	42	55
J2X	60	1.772	2.362	45	60
J65A	65	1.772	2.559	45	65
J3	70	1.969	2.756	50	70
J75A	75	2.165	2.953	55	75
J3X	80	2.362	3.150	60	80
J4	90	2.756	3.543	70	90
J4X	100	3.150	3.937	80	100
J110A	110	3.543	4.331	90	110
J5	115	3.740	4.528	95	115
J5X	120	3.937	4.724	100	120
J6	130	4.331	5.118	110	130
J57S	145	4.921	5.709	125	145
J6X	160	5.512	6.299	140	160

Additional sizes are available as per enquiry.

Size J00M to J1 not available in 16mm band width.

Jolly sizes equivalent to SAE Standard

Jolly Size Ordering Code	SAE Sizes	Min Dia (in)	Max Dia (in)	Min Dia (mm)	Max Dia (mm)
06	06	7/16	25/32	11.2	19.8
08	08	7/16	1	11	25
10	10	1/2	1 1/16	13	27
12	12	1/2	1 1/4	13	32
16	16	11/16	1 1/2	18	38
20	20	3/4	1 3/4	19	44
24	24	1	2	25	51
28	28	1 1/4	2 1/4	32	57
32	32	1 1/2	2 1/2	38	63
36	36	1 3/4	2 3/4	44	70
40	40	2	3	51	76
44	44	2 1/4	3 1/4	57	82
48	48	2 1/2	3 1/2	64	89
52	52	2 3/4	3 3/4	70	95
56	56	3	4	76	101
60	60	3 1/4	4 1/4	83	108
64	64	2 1/2	4 1/2	64	114
72	72	3	5	76	127
80	80	3 1/2	5 1/2	89	140
88	88	4	6	102	152
96	96	4 1/2	6 1/2	114	165
104	104	5	7	127	178

Additional sizes are available as per enquiry.

Size SAE 06 to SAE 16 not available in 16mm band width.

We reserve the right to make technical modifications.

UPC code can be made available on request.

Packing Specification available.