


Formed Thread Worm Drive Clamp_(One Way)



Ref. standard: DIN 3017 - 1

- One sided threads on band surface.
- Smooth finish of inner surface.
- Eliminates damage to hose, in turn ensuring leak proof joint.

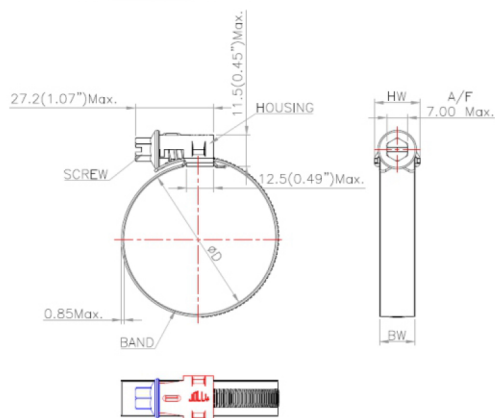

Example for Ordering Code

FS M01 B11 06

Design Type

Jolly Size

Material Grade

Band width (BW) & Housing width (HW)

* Jolly size ordering codes vary as per SAE & IS/BS sizes.

Design Type Ordering Code : FS

DN equivalent	Ordering Code	Material Grade Option
W4	M01	All parts : SS 301 / 304
W1	M11	All parts : Plated Carbon Steel
W3	M09	All parts : SS 430
W5	M06	All parts : SS 316

Ordering Code	Band Width (BW)
B11	Band : 13 mm max.
B15	Band : 9.5 mm max.

Note: Clamps below dia 22 mm can be made in B11 ordering code.

Jolly sizes

Jolly Size Ordering Code	Min Dia (in)	Max Dia (in)	Min Dia (mm)	Max Dia (mm)
J000	0.354	0.472	9	12
J00M	0.433	0.630	11	16
J00	0.512	0.787	13	20
J0	0.630	0.866	16	22
J100S	0.709	0.984	18	25
J0X	0.787	1.102	20	28
J1A	0.866	1.181	22	30
J137S	0.984	1.378	25	35
J1	1.181	1.496	30	38
J1X	1.181	1.575	30	40
J45A	1.378	1.772	35	45
J2A	1.496	1.969	38	50
J2	1.654	2.165	42	55
J2X	1.772	2.362	45	60
J3	1.969	2.756	50	70
J75A	2.165	2.953	55	75
J3X	2.362	3.150	60	80
J4	2.756	3.543	70	90
J4X	3.150	3.937	80	100
J110A	3.543	4.331	90	110
J5	3.740	4.528	95	115
J5X	3.937	4.724	100	120
J6	4.331	5.118	110	130
J575 S	4.921	5.709	125	145
J6X	5.512	6.299	140	160

Additional sizes are available as per enquiry.

We reserve the right to make technical modifications.
UPC code can be made available on request.
Packing Specification available.